

# CONTEXT


Rectified Glazed Gres Porcelain

# KREM



**GRAFFITI**

## DETAIL

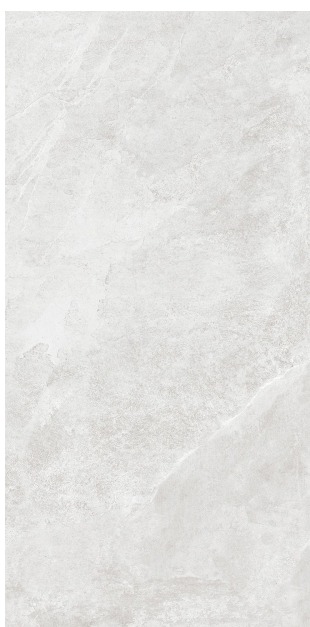

**GRAFFITI**



**DARK GREY**

**4**

PEI

**V2**

Shades

**>6**

Mohs



ColdRes

**RET**

Rectified

**SIZE & PACKING INFO** Pcs./Ctn. m<sup>2</sup>/Ctn. Ctn./Pallet kg/Ctn.

30 x 30cm	8	1,44	40	30	Other cut-downs available on request.
60 x 60cm	4	1,44	40	30	
60 x 120cm	2	1,44	40	30	

**Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42**

## PRODUCT DESCRIPTION

Rectified 60x60 & 60x120cm Floor Tile  
Available in Matt Mould and upon request, R11 anti-slip finishes.  
4 faces 60x120cm



**CONTEXT**

**DARK GREY**

**4 faces 60x120cm**

**KREM**





**CONTEXT**

**GRAFFITI**

**4 faces 60x120cm**

**KREM**



# CONTEXT PRODUCT SPECIFICATION















## GLAZED GRES PORCELAIN FLOOR TILE

Pressed Ceramic Tiles International Norm

ISO 13006-10545/98

GROUP: B1b

# KREM

No.	Icon	Test item	Unit	Requirements of Standard		Test result	Result
1		Dimensional variation	(%)	length of side	0.6	< 0.6	Qualified
2		Side straightness	(%)	$\pm 0.5$		< 0.5	Qualified
3		Squareness	(%)	$\pm 0.5$		< 0.5	Qualified
4		Surface flatness	(%)	Center curvature degree	$\pm 0.5$	< 0.5	Qualified
				Warping degree	$\pm 0.5$	< 0.5	Qualified
				Side curvature degree	$\pm 0.5$	< 0.5	Qualified
5		Surface quality	—	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile		conformed	Qualified
6		Water absorption	(%)	Average value $\leq 3$ individual $\leq 3.3$		< 3 < 3	Qualified
7		Breaking strength	N	When thickness $\geq 7.5\text{mm}$ the Average value $\geq 700$		>700	Qualified
8		Rupture modulus	Mpa	Average value $\geq 30$ individual $\geq 27$		> 30 > 30	Qualified
9		Abrasion resistance	revs	> 1500		> 1700	Qualified Class 3
10		Scratch resistance	MOH	—		> 6	Qualified
11		Frost resistance	—	No cracking after test		conformed	Qualified
12		Resistance to acids & alkalis	—	not less than grade GB		Grade GA	Qualified
13		Chemical resistance	—	not less than grade GB		Grade GA	Qualified
15		Slip resistance	R	Ramp slip rating test		R11	Exterior
			DCoF	DCoF: 0.42		>0.42	Matt/Exterior