

HILTON TERRAZZO

Rectified Glazed Floor Tile

KREM



ACTUAL SIZE DETAIL



>6

Mohs

V3

Shades



ColdRes

RET

Rectified

SIZE & PACKING INFO

60 x 60cm

Pcs./Ctn.

4

m²/Ctn.

1,44

Ctn./Pallet

40

kg/Ctn.

30

Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42


PRODUCT DESCRIPTION

Rectified Glazed Floor Tile 60 x 60 and 60 x 120cm on request.
Available in Matt & Lapatto finishes.
3 different faces

HILTON TERRAZZO

3 faces



KREM

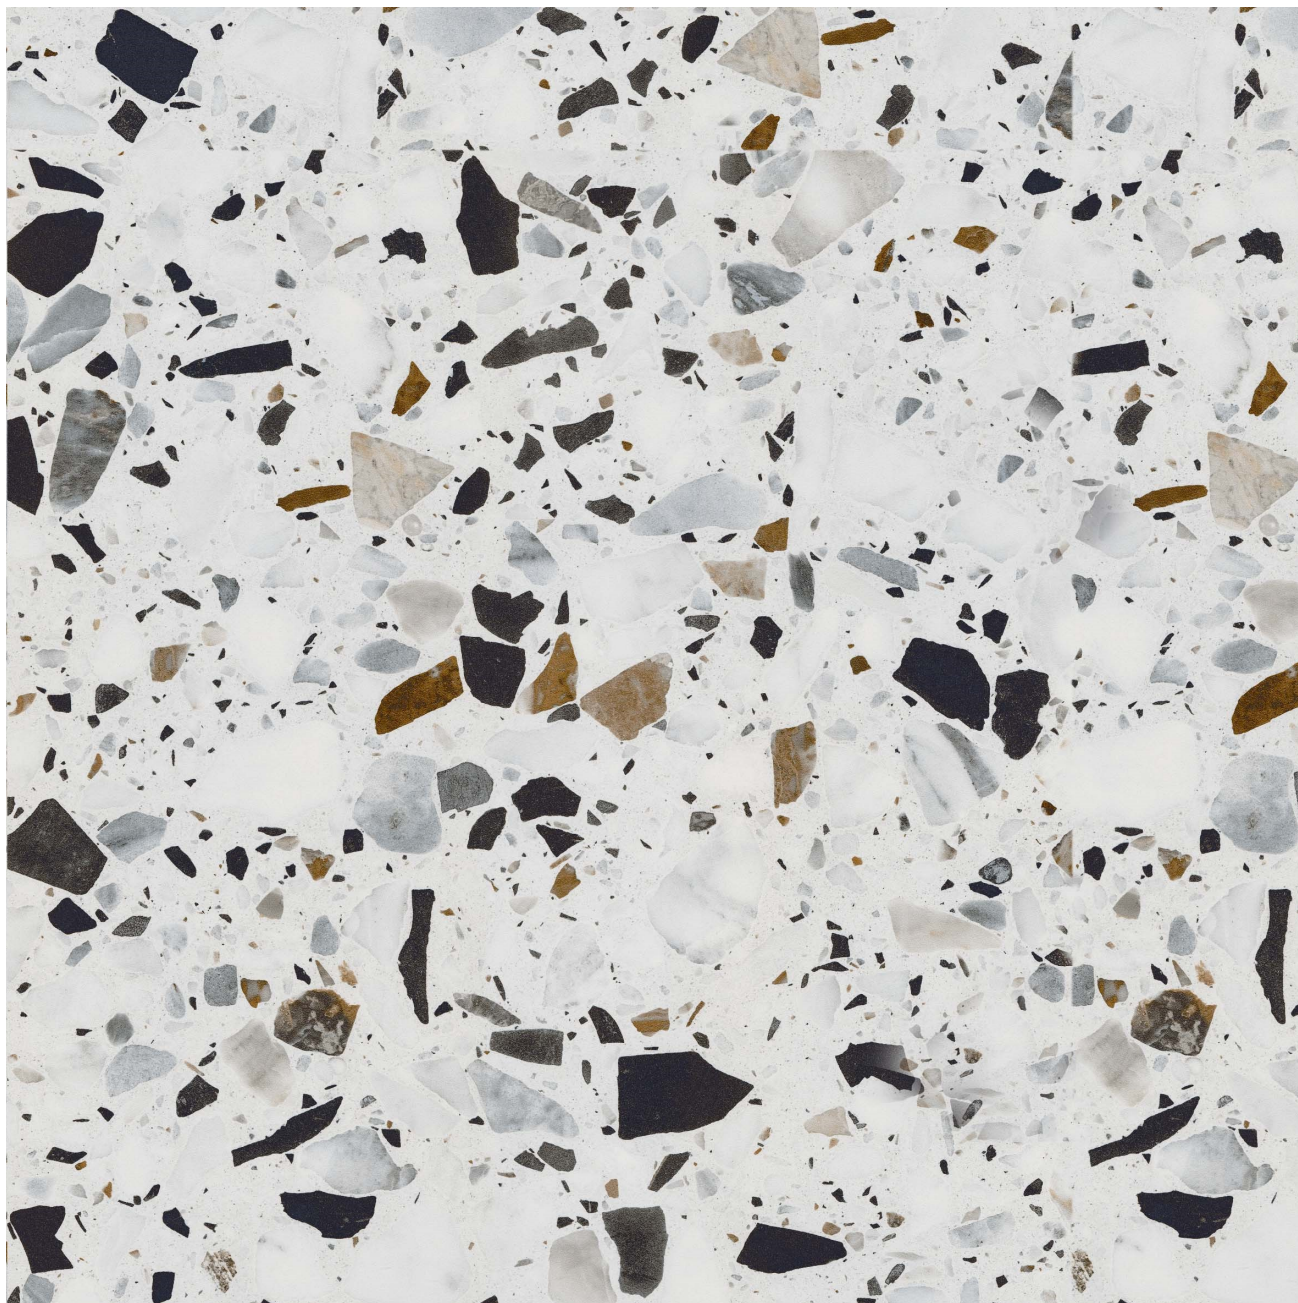

HILTON TERRAZZO

3 faces

KREM

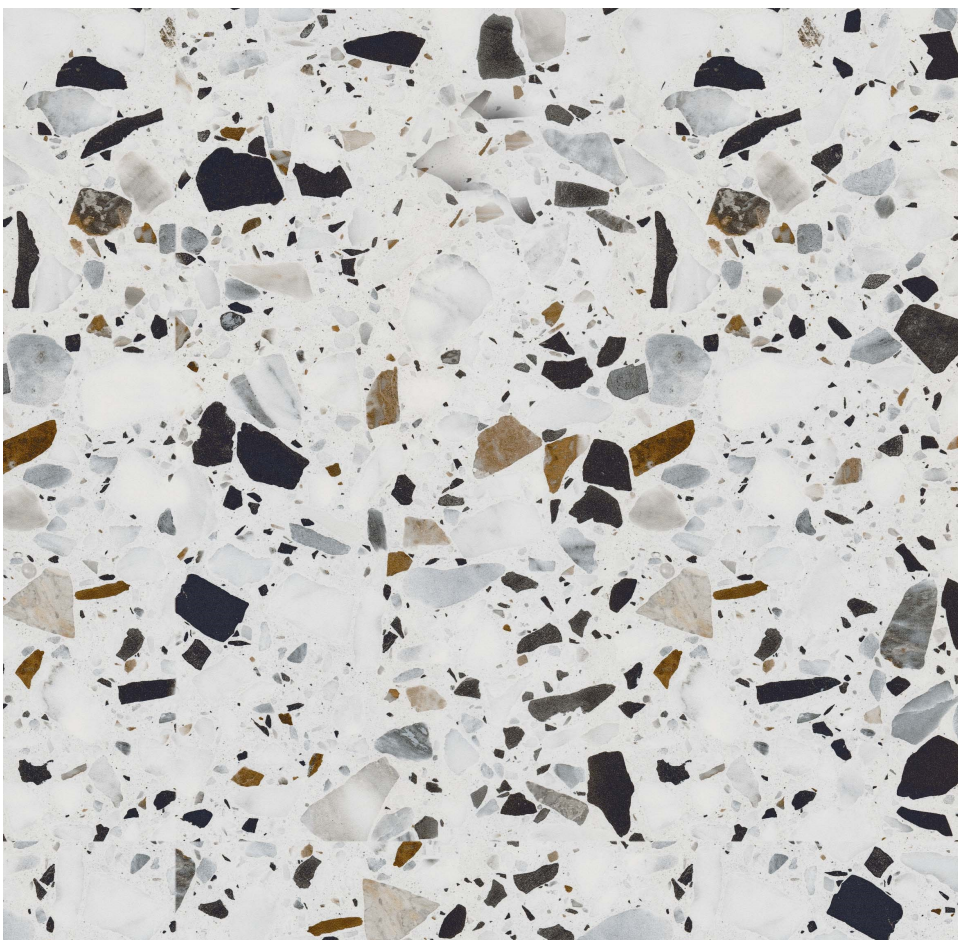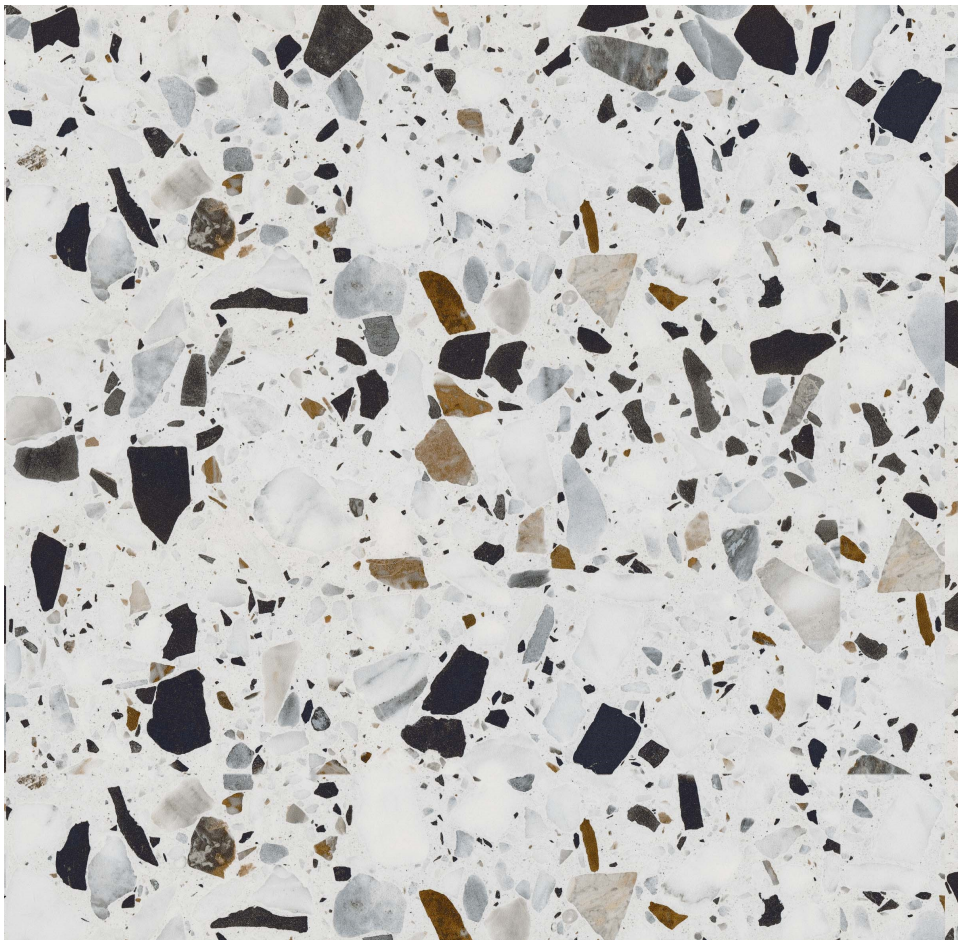

HILTON TERRAZZO

PRODUCT SPECIFICATION



GLAZED FLOOR TILE

Pressed Ceramic Tiles International Norms

ISO 13006–10545/98

GROUP: B1

No.	Icon	Test item	Unit	Requirements of Standard		Specifica- tion	Require- ment
1		Dimensional variation	(%)	length of side	± 0.6	< 0.6	Qualified
2		Side straightness	(%)	± 0.5		< 0.5	Qualified
3		Squareness	(%)	± 0.6		< 0.6	Qualified
4		Surface flatness	(%)	Center curvature degree	± 0.5	< 0.5	Qualified
				Warping degree	± 0.5	< 0.5	Qualified
				Side curvature degree	± 0.5	< 0.5	Qualified
5		Surface quality	—	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile		conformed	Qualified
6		Breaking strength	N	When thickness $\geq 7.5\text{mm}$ the Average value ≥ 1100		> 1100	Qualified
7		Rupture modulus	Mpa	Average value ≥ 30 individual ≥ 27		> 30 > 30	Qualified
8		Abrasion resistance	Revs	1500		> 1500	Qualified
9		Hardness	MOHS	Mohs Scale		> 6	Qualified
10		Frost resistance	—	No cracking after test		conformed	Qualified
11		Resistance to acids & alkalis	—	not less than grade GB		Grade GA	Qualified
12		Chemical resistance	—	not less than grade GB		Grade GA	Qualified
13		Slip resistance	R	Ramp slip rating test		R11	Matt
			DCoF	DCoF: 0.42		> 0.42	Matt