


# PAVEMENT


Rectified Glazed Floor Tile




## ACTUAL SIZE DETAIL



Bianco



Mid Grey



Charcoal

V2

Shades

>6

Mohs



ColdRes

RET

Rectified

## SIZE & PACKING INFO

	Pcs./Ctn.	m <sup>2</sup> /Ctn.	Ctn./Pallet	kg/Ctn.
30 x 60cm	8	1,44	40	28
60 x 60cm	4	1,44	40	29


Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42

## PRODUCT DESCRIPTION

Rectified 30 x 60 & 60 x 60cm Glazed Floor Tile  
Available in Matt, Lapatto and R11 anti-slip finishes.  
Six 60 x 60cm faces





**PAVEMENT  
BIANCO**

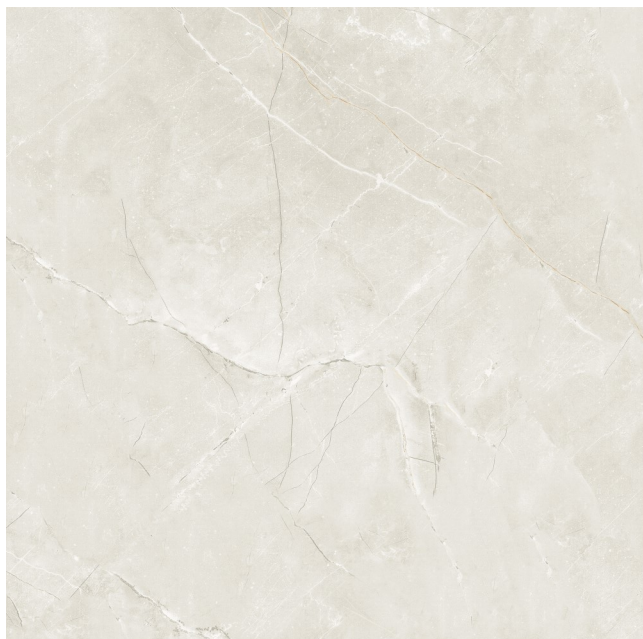



**PAVEMENT**  
**MID GREY & CHARCOAL**

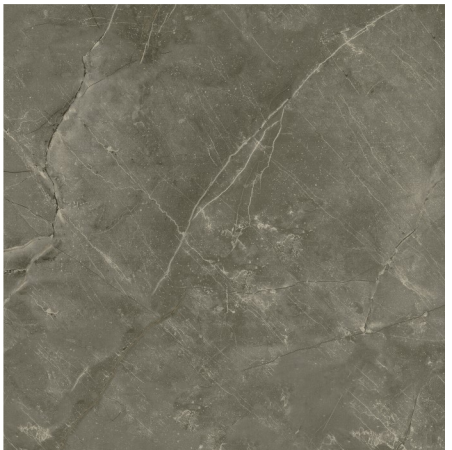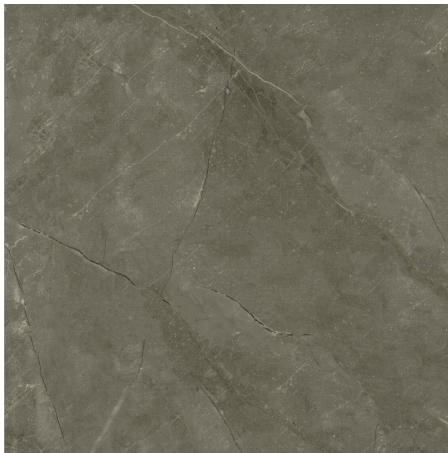

# PAVEMENT PRODUCT SPECIFICATION














GLAZED FLOOR TILE

Pressed Ceramic Tiles International Norm

ISO 13006-10545/98

GROUP: B1

TESSCERA™

No.	Icon	Test item	Unit	Requirements of Standard		Specifica- tion	Require- ment
1		Dimensional variation	(%)	length of side	$\pm 0.6$	$< 0.6$	Qualified
2		Side straightness	(%)	$\pm 0.5$		$< 0.5$	Qualified
3		Squareness	(%)	$\pm 0.6$		$< 0.6$	Qualified
4		Surface flatness	(%)	Center curvature degree	$\pm 0.5$	$< 0.5$	Qualified
				Warping degree	$\pm 0.5$	$< 0.5$	Qualified
				Side curvature degree	$\pm 0.5$	$< 0.5$	Qualified
5		Surface quality	—	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile		conformed	Qualified
6		Breaking strength	N	When thickness $\geq 7.5\text{mm}$ the Average value $\geq 1100$		$> 1100$	Qualified
7		Rupture modulus	Mpa	Average value $\geq 30$ individual $\geq 27$		$> 30$ $> 30$	Qualified
8		Abrasion resistance	Revs	1500		$> 1500$	Qualified
9		Hardness	MOHS	Mohs Scale		$> 6$	Qualified
10		Frost resistance	—	No cracking after test		conformed	Qualified
11		Resistance to acids & alkalis	—	not less than grade GB		Grade GA	Qualified
12		Chemical resistance	—	not less than grade GB		Grade GA	Qualified
13		Slip resistance	R	Ramp slip rating test		R11	Exterior
			DCoF	DCoF: 0.42		$> 0.42$	Matt/ Exterior