
GLACIER

Rectified Glazed Floor Tile

KREM





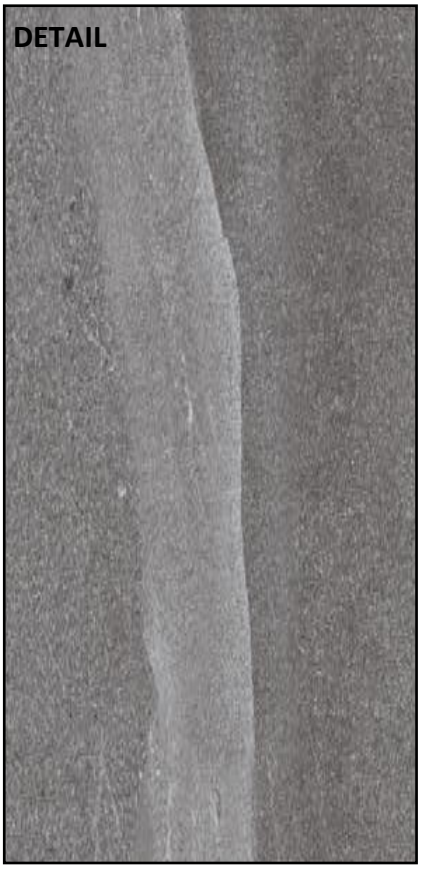

Graphite



Ice

>6 Mohs

V3 Shades

ColdRes

RET Rectified

SIZE & PACKING INFO	Pcs./Ctn.	m^2/Ctn.	Ctn./Pallet	kg/Ctn.
60 x 60cm	4	1,44	40	30
60 x 120cm	2	1,44	40	30

Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42

PRODUCT DESCRIPTION Rectified Glazed Floor Tile 60 x 60 and 60 x 120cm
Available in Polished, Matt, Lapatto and R11 anti-slip finishes.
10 different faces of 60x60 and 5 faces of 60x120cm

GLACIER

ICE

5 faces 60x120 & 10 faces 60x60cm

KREM





GLACIER


GRAPHITE


5 faces 60x120 & 10 faces 60x60cm


KREM

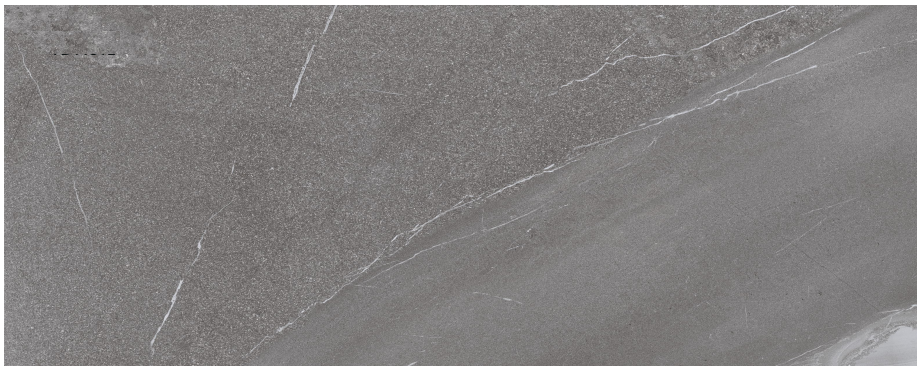

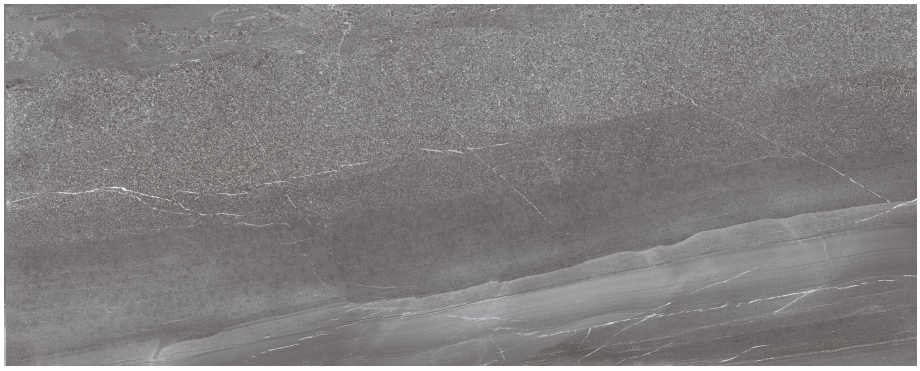

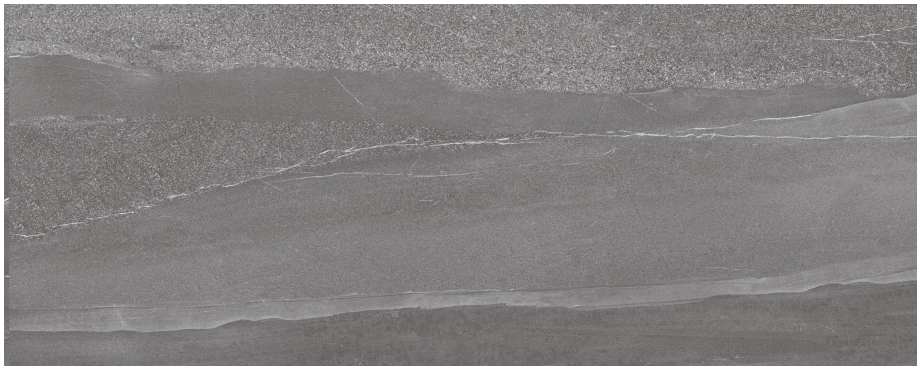

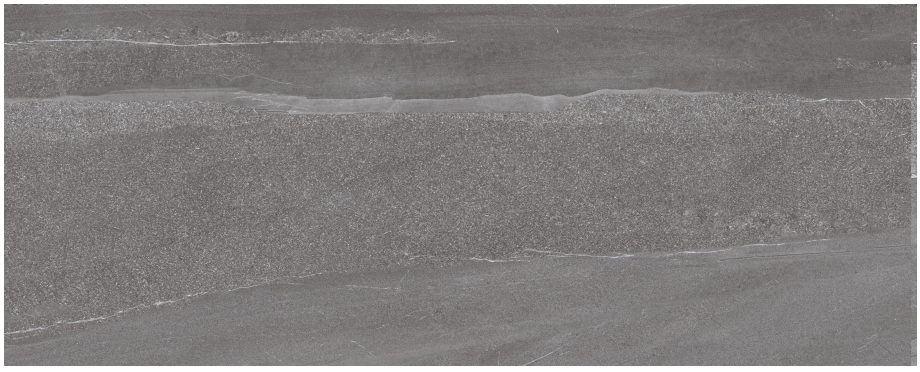

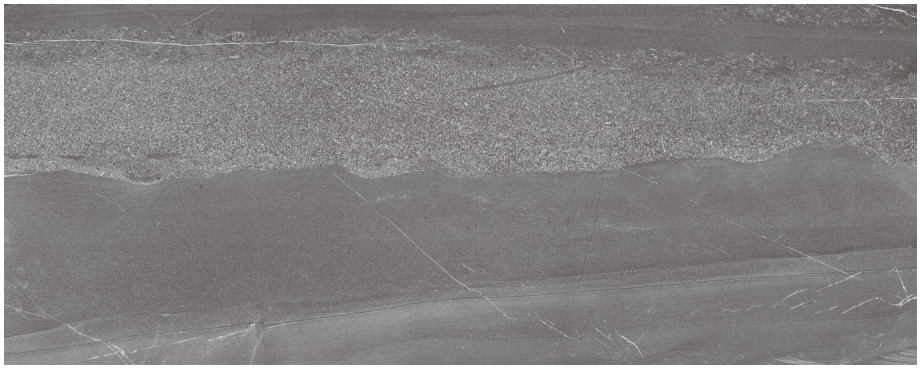

GLACIER PRODUCT SPECIFICATION

GLAZED FLOOR TILE

Pressed Ceramic Tiles International Norms

ISO 13006-10545/98

GROUP: B1

KREM

No.	Icon	Test item	Unit	Requirements of Standard		Specification	Requirement
1		Dimensional variation	(%)	length of side	±0.6	< 0.6	Qualified
2		Side straightness	(%)	± 0.5		< 0.5	Qualified
3		Squareness	(%)	± 0.6		< 0.6	Qualified
4		Surface flatness	(%)	Center curvature degree	± 0.5	< 0.5	Qualified
				Warping degree	± 0.5	< 0.5	Qualified
				Side curvature degree	± 0.5	< 0.5	Qualified
5		Surface quality	—-	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile		conformed	Qualified
6		Breaking strength	N	When thickness ≥ 7.5mm the Average value ≥ 1100		> 1100	Qualified
7		Rupture modulus	Mpa	Average value ≥ 30 individual ≥ 27		> 30 > 30	Qualified
8		Abrasion resistance	Revs	1500		> 1500	Qualified
9		Hardness	MOHS	Mohs Scale		> 6	Qualified
10		Frost resistance	—-	No cracking after test		conformed	Qualified
11		Resistance to acids & alkalis	—-	not less than grade GB		Grade GA	Qualified
12		Chemical resistance	—-	not less than grade GB		Grade GA	Qualified
13		Slip resistance	R	Ramp slip rating test		R11	Matt/ exterior
			DCoF	DCoF: 0.42		>0.42	Matt